


# FIBERED ASPHALT EMULSION ROOF COATING

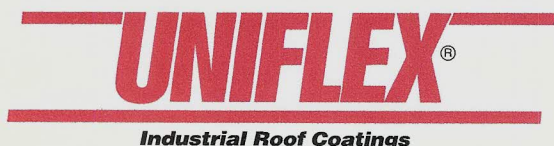

40-312

## PRODUCT INFORMATION

### PRODUCT DESCRIPTION

**Uniflex® Fibered Asphalt Emulsion** is manufactured from a special formulation of asphalt combined with emulsifiers that allow the asphalt to mix with water forming a safe, easy-to-apply coating. The coating exhibits outstanding abrasion resistance and exceptional weathering characteristics to prevent alligatoring and to keep the asphalt from hardening and is reinforced with Poly-fibers for extra strength and durability. Fibered Asphalt Emulsion Coating meets the physical property requirements of ASTM D - 1227, Type II, Class 1.

### RECOMMENDED USES

Uniflex® Fibered Asphalt Emulsion is recommended for resurfacing extremely dried out or heavily alligatored surfaces on smooth built-up and modified bitumen roofs. Surface can then be coated with Uniflex® Elastomeric or Aluminum Coating systems.

This coating can also be applied by brush or spray to interior walls, in cavity wall construction and exterior surfaces of concrete, metal and wood above or below grade to form a protective coating against dampness.

### PRODUCT CHARACTERISTICS

Color.....Black  
 Vehicle Base.....Asphalt  
 Weight per Gallon.....8.6 lbs.  
 Solids by Weight (ASTM 2369).....46 ± 2%  
 Solids by Volume.....44 ± 2%  
 Dry Film Thickness.....7.5 mils  
 (@ 1 gal./100 sq. ft. less surface absorption)

Dry Time  
 Exposure.....12 hours  
 Between coats.....24 - 48 hours  
 % Asphalt.....46% min.  
 Ash on Basis of Non-Volatile Material.....5% min.  
 Penetration on Base Asphalt (ASTM DS).....55 min.  
 Specific Gravity.....1.05  
 VOC.....<0 g/l  
 Flash Point of Base Asphalt @ 77° F.....450° F  
 Ductility of Base Asphalt @ 77°F.....50 min.  
 Solvent.....Water  
 Clean up.....Warm, soapy water

#### Application Rate:

Apply each coat at a rate of 2 - 4 gallons per 100 square feet. See system specifications for more details.

### PERFORMANCE CHARACTERISTICS

